

Results of experimental studies of geologic profile over hydrocarbon deposits

Viktar Yanushkevich^{1*}, *Dzmitry Dauhiala*¹, *Iryna Burachonak*¹, *Yury Grozberg*¹, and *Natallia Fedarovich*¹

¹Euphrosyne Polotskaya State University of Polotsk, 29, Blokhin Street, Novopolotsk, Vitebsk Region, 211440, Belarus

Abstract. The article presents the results of experimental studies of geologic profile over hydrocarbon deposits in the Republic of Belarus. Experimental studies were carried out at the Marmovichi and the Geologicheskoye fields of hydrocarbon deposits in the Gomel region. Measurement of the phase of the surface impedance of the geological profile over hydrocarbon deposits under the influence of electromagnetic waves with amplitude-frequency modulation was carried out. It has been found that the use of two modes for measuring the phase of surface impedance increases the accuracy of delineation of hydrocarbon deposits. A method at carrier frequencies of 0.1...2 GHz for amplitude-frequency modulated signals has been developed. The above studies can be applied to the development of methods for exploration of hydrocarbon deposits.

1 Introduction

The relevance of hydrocarbon deposits prospecting methods is caused by the increased needs of electrical exploration for the accuracy of hydrocarbon delineation [1]. At the same time, a great role is given to the interpretation of soil distribution, fault mapping and obtaining information on rock characteristics [2]. Studies have been carried out to determine the rate of surface uplift under the influence of steam-assisted gravity drainage (SAGD) at the Hangingstone oil sands deposits in Alberta (Canada) using interferograms of synthetic aperture radar (SAR) [3].

The modes of application of two-frequency electromagnetic waves increase the accuracy of hydrocarbon boundary identification to determine the reflecting characteristics of the geological profile over hydrocarbon deposits [4]. The results of the monotonous function method showed fairly high estimates of the probability of determining possible deposits at sufficiently low error probabilities [5]. The cases of reservoir studies by methods and methodology of SPFB detection are considered [6].

At present, marine electromagnetic methods are rapidly developing with the industrial introduction of equipment for the study of offshore hydrocarbon facilities [7]. The dynamics of displacement of crustal structures in the area of a large oil field under development is being studied [8]. Modern methods and algorithms for processing space,

* Corresponding author: v.yanushkevich@psu.by

geological-geophysical and geochemical information are one example of improving the accuracy of hydrocarbon boundary delineation [9]. The opportunities and results of practical use of satellite radar imagery and interferometry in geological exploration for oil and gas are presented in the paper [10].

The analysis of the possibilities of using the radar interferometry method is given for quantitative assessment of the rates of modern relief-forming processes [11]. The complexity and high cost of obtaining geological and geophysical information by traditional methods in hard-to-reach areas where hydrocarbons are prospected and produced increases the importance of remote data acquisition technologies [12].

The purpose of this research is to develop a method for prospecting hydrocarbon deposits.

2 Materials and methods


Experimental studies of the surface impedance of the medium above the hydrocarbon deposits in the mode of amplitude-frequency-modulated signals (AFM) [1] with the use of a system for the realization of phase measurements (Figure 1) were carried out. The use of this type of interaction of signals with hydrocarbon deposits will increase the informativeness of prospecting and identification methods.

With the help of device 12 and phasemeter 13 phase shifts are determined:

$$\Delta\varphi_1 = \varphi_{z11}^1 - \varphi_{z11}^2 \quad (1)$$

$$\Delta\varphi_2 = \varphi_{z12}^1 - \varphi_{z12}^2 \quad (2)$$

Where $\Delta\varphi_1$, $\Delta\varphi_2$ - phase differences of the surface impedance for 1 and 2 channels, respectively; φ_{z11}^1 , φ_{z11}^2 - phases of the surface impedance for the components of the AFM signal along the x and y axes for the right circular polarization; φ_{z12}^1 , φ_{z12}^2 - phases of the surface impedance for the components of the AFM signal along the x and y axes for the left circular polarization.

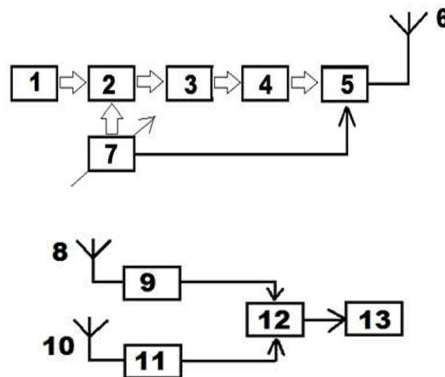

1 - signal source; 2 - frequency modulator; 3 - intermediate stage; 4 - amplitude modulator; 5 - power amplifier; 6, 8, 10 - antennas; 7 - modulating frequency source; 9, 11 - radio receivers; 12 - comparison device; 13 - phasemeter.

Fig. 1. Equipment for phase measurements in the mode of amplitude-frequency modulated signals.

3 Results and Discussion

The proposed method was tested at the Marmovichi and the Geologicheskoye fields of the hydrocarbon deposits in the Gomel region. When one point (Figure 2) of phase determination (mode 2) is located on the deposit boundary and the second one - behind the deposit (measurement point 250 for the Marmovichi field), the phase \dot{Z}_{11} decreases from the value of 2.0 rad (carrier signal frequency $f = 100$ MHz) to the value of - 0.3 rad (carrier signal frequency $f = 700$ MHz) and changes to 0 rad (carrier signal frequency $f = 1000$ MHz). At carrier signal frequencies $f = 1500 - 2000$ MHz there is a decrease in the phase \dot{Z}_{11} to a value of - 0.2 rad. According to the anomalous values of the phase \dot{Z}_{11} , the boundary of the hydrocarbon deposits was fixed. In the case of finding both determination points (mode 1) behind the deposit, the phases differ in two channels with a maximum of 0.3 rad (carrier signal frequency $f = 100$ MHz). In the case of both determination points (mode 3) above the hydrocarbon deposits, phase differences are observed in two channels with a maximum of 0.5 rad (carrier signal frequency $f = 100$ MHz).

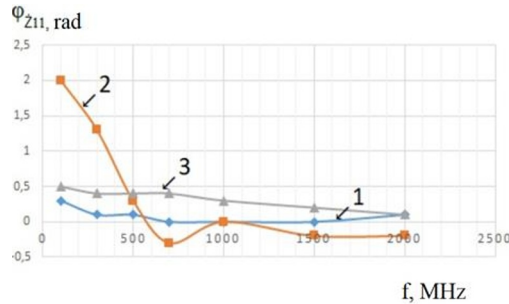


Fig. 2. Results of \dot{Z}_{11} phase studies for the Marmovichi field: 1 - mode 1, 2 - mode 2, 3 - mode 3.

When one point (Figure 3) of phase determination (mode 2) is located on the deposit boundary and the second one - behind the deposit (measurement point 250 for the Marmovichi field), the phase \dot{Z}_{12} decreases from 0.3 rad (carrier signal frequency $f = 100$ MHz) to 0.1 rad (carrier signal frequency $f = 2000$ MHz). According to the anomalous values of the \dot{Z}_{12} phase, the boundary of the hydrocarbon deposits was fixed. In the case of finding both points of determination (mode 1) behind the deposit, the phases differ in two channels with a maximum of 0.3 rad (carrier signal frequency $f = 500$ MHz). When both determination points (mode 3) are located above the hydrocarbon deposits, phase differences are observed in two channels with the presence of both negative and positive phase differences.

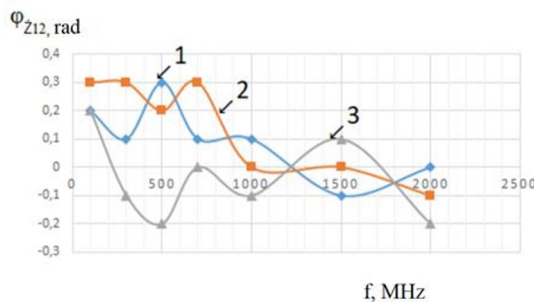


Fig. 3. Results of \dot{Z}_{12} phase studies for the Marmovichi field: 1 - mode 1, 2 - mode 2, 3 - mode 3.

When one point (Figure 4) of phase determination (mode 2) is located at the deposit boundary and the second one - behind the deposit (measurement point 200 for the Geological Field), the phase \dot{Z}_{11} decreases from the value of 1.7 rad (carrier signal frequency $f = 100$ MHz) to the value of 0 rad (carrier signal frequency $f = 1000$ MHz) and with an increase to 0.1 rad (carrier signal frequency $f = 1500$ MHz). At the carrier signal frequency $f = 2000$ MHz there is a decrease in the phase component \dot{Z}_{11} from a value of -0.1 rad. By the anomalous values of the phase \dot{Z}_{11} , the boundary of the hydrocarbon deposits was fixed. In the case of finding both determination points (mode 1) behind the deposit, the phases differ in two channels with maxima of 0.3 rad (carrier signal frequencies $f = 100, 300$ MHz). In the case of finding both points of determination (mode 3) above the hydrocarbon deposits, phase differences are observed in two channels with a maximum of 0.5 rad (carrier signal frequencies $f = 100, 300$ MHz).

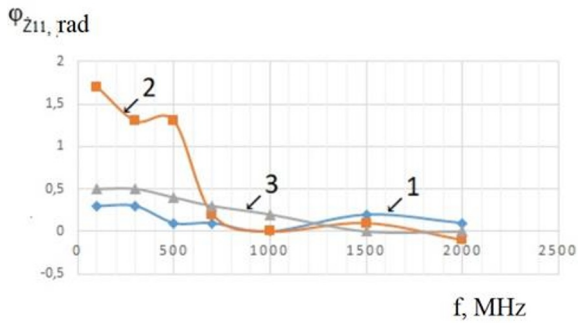


Fig. 4. Results of \dot{Z}_{11} phase studies for the Geological Field: 1 - mode 1, 2 - mode 2, 3 - mode 3.

When one point (Figure 5) of phase determination (mode 2) is located at the deposit boundary and the second one - behind the deposit (measurement point 200 for the Geological Field), the phase \dot{Z}_{12} decreases from the value of 0.3 rad (carrier signal frequencies $f = 100, 300$ MHz) to the value of 0 rad (carrier signal frequencies $f = 1000 - 2000$ MHz). According to the anomalous values of the \dot{Z}_{12} phase, the boundary of the hydrocarbon deposits was fixed. In case of finding both determination points (mode 1) behind the deposit, the phases differ in two channels with maxima of 0.2 rad (carrier signal frequencies $f = 100, 300, 2000$ MHz). In the case of both determination points (mode 3) above the hydrocarbons, the phase differences are observed in two channels with maxima of 0.3 rad (carrier signal frequencies $f = 100, 300$ MHz).

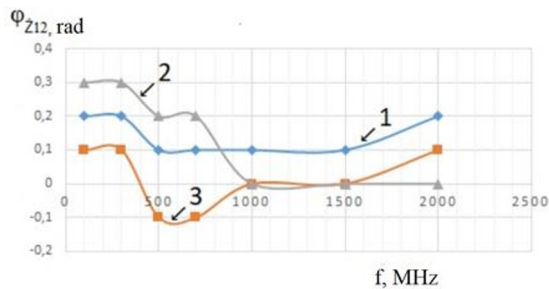


Fig. 5. Results of \dot{Z}_{12} phase studies for the Geological Field: 1 - mode 1, 2 - mode 2, 3 - mode 3.

The measurement data of \dot{Z}_{11} and \dot{Z}_{12} phases of the surface impedance are given at modulation frequency $F = 10$ MHz, amplitude modulation factor $k_m = 0.5$ and frequency modulation index $\beta = 20$.

4 Conclusion

As a result of the conducted research it should be noted:

- The equipment for realization of phase measurements in the mode of amplitude-frequency modulated signals at carrier frequencies of 0.1...2 GHz has been developed.
- Application of two modes of surface impedance phase measurement increases the accuracy of delineation of hydrocarbon deposits.
- The results of the research can be applied in the electrical prospecting of hydrocarbon deposits.

References

1. V.F. Yanushkevich, Electromagnetic methods of search and identification of hydrocarbon deposits, Navapolatsk (2017)
2. Q. Zhao, H. Lin, Y. Zhang, L. Jiang, F. Chen, S. Cheng, Analysis of active ground subsidence zones in Guangzhou city using ASAR Persistent Scatterer Interferometry, 2009 Joint Urban Remote Sensing Event, IEEE (2009)
3. MYN. Khakim, T. Tsuji, T. Matsuoka, Detection of localized surface uplift by differential SAR interferometry at the hangingstone oil sand field, Alberta, Canada. IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing **6.6** (2013)
4. V.F. Yanushkevich, *Hydrocarbon exploration technique based on the ratio coefficient measurement of two-frequency amplitudes*, IOP Conference Series: Earth and Environmental Science. IOP Publishing, **1231**, **1** (2023)
5. K.N. Petrov, The method of monotonic functions and its application to the forecast of hydrocarbon deposits. Information processes, **23**, **1**, 126-137 (2023)
6. M. Karger, D. Trofimov, A. Eminov, I. Myasnikov, A. Zakharov, The early detection of semi-permeable filtration barriers by using SAR interferometry. IEEE Geoscience and Remote Sensing Symposium (2014)
7. K. Key, Marine electromagnetic studies of seafloor resources and tectonics. Surveys in geophysics, **33**, 135-167 (2012)
8. M.K. Shuvaeva, D.M. Trofimov, Alexander Zakharov, Structural model of oil field limestone reservoir in Denisov depression based on ALOS PALSAR images and seismic exploration data. IEEE International Geoscience and Remote Sensing Symposium (2012)
9. D.M. Trofimov, V.N. Yevdokimenkov, M.K. Shuvaeva, Modern methods and algorithms for processing space, geological, geophysical and geochemical information to predict the hydrocarbon potential of unexplored subsoil sections (Fizmatlit, Moscow, 2012)
10. D.M. Trofimov, Possibilities and results of the practical use of satellite radar imaging and interferometry in geological exploration for oil and gas. Geology, geophysics and development of oil and gas fields, 25–29 (2009)

11. L.B. Berman, A.I. Zakharov, Contribution of space radar interferometry to the study of large Yamal fields: the example of the Yamburg field. *Earth from space*, **8**, 57-70 (2011)
12. D.M. Trofimov, V.N. Evdokimenkov, V.V. Malyshev, Methodology for assessing the oil and gas potential of structural traps identified and prepared for exploratory drilling, based on space and geological-geophysical data. *Geomatics*, **1, 2**, 42 – 48 (2009)